



PA3200AHD AUDIO DISTRIBUTION FRAME

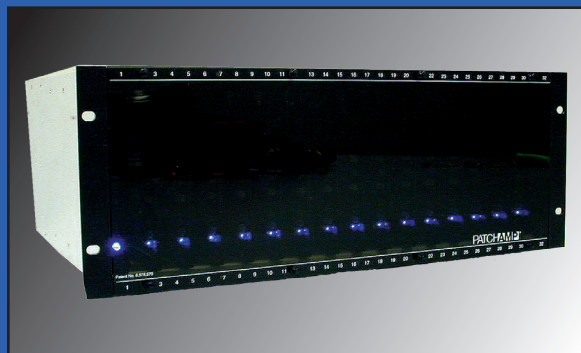

*Up to 64 1-in by 4-out distribution amps per frame
Also can be configured as 1-in by 9-out
Compact design offers high module density
Accepts all patchamp high density modules
Frame houses AES and Analog
See thru front cover allows quick status indication
Lightest weight per distribution amplifier
Lowest power consumption per distribution amplifier*

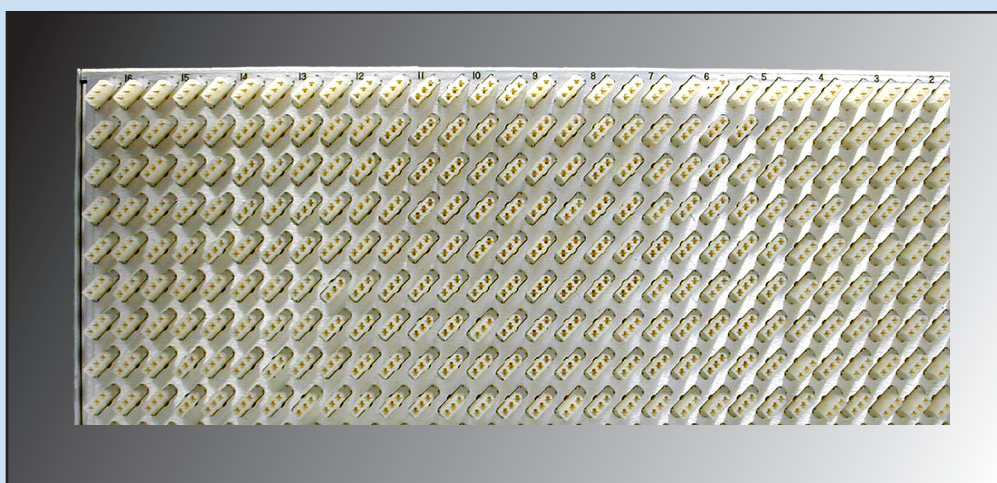

SPECIFICATIONS

Mechanical

PA3200AHD	
Height	7 inches (4RU)
Width	19 inches
Depth	16 inches
Nominal Weight	21 lbs. FULLY LOADED

Electrical

PA3200AHD	
Connectors	Elco 3-pin, 110 ohm
Number of inputs	up to 64
Number of outputs	up to 288

Power

Type	External, 48Vdc
Input Voltage	90-264 Vac, 47-63 Hz, Single Phase
Redundancy	N+1, hot swappable modules
Power Factor	>.99
EMI	complies with EN55022 & FCC Class A

The PA3200AHD is a 4RU frame specifically designed to reduce the amount of rack space housing audio distribution amplifiers. One 4RU PA3200AHD replaces at least four 2RU old style trays. This universal frame employs a 110-ohm wired midplane for optimum performance for all twisted pair audio signals.



PatchAmp
20 East Kennedy Street
Hackensack, New Jersey 07601
phone (201) 457-1504 fax (201) 457-1504
www.patchamp.com